

# (12) UK Patent Application (19) GB (11) 2 272 762 (13) A

(43) Date of A Publication 25.05.1994

(21) Application No 9323372.4

(22) Date of Filing 12.11.1993

(30) Priority Data

(31) 04304191  
03276645

(32) 13.11.1992  
05.11.1993

(33) JP

(71) Applicant(s)

Laurel Bank Machines Co Ltd

(Incorporated in Japan)

No 1-2 Toranomon 1-chome, Minato-ku, Tokyo, Japan

(72) Inventor(s)

Tohru Nakajima  
Mitsuhiko Nagase

(74) Agent and/or Address for Service

Bout Wade Tennant  
27 Fumival Street, LONDON, EC4A 1PQ,  
United Kingdom

(51) INT CL<sup>B</sup>

G01N 21/88, G07D 5/00 7/00 // G01N 21/89

(52) UK CL (Edition M)

G1A AA9 AG17 AMBP AR7 AT21 AT3  
U1S S2272

(56) Documents Cited

GB 2192275 A GB 2107911 A GB 2038849 A  
GB 1384501 A EP 0240277 A2 EP 0101115 A1


(58) Field of Search

UK CL (Edition M) G1A AMBP AMZ  
INT CL<sup>B</sup> G01N 21/88 21/89, G01R 31/308, G07D 5/00  
7/00

(54) Pattern detecting apparatus

(57) A pattern detecting apparatus has irradiating means 1, 3 and an optical fibre bundle 2 for emitting light and irradiating a surface of an object (7) eg. a banknote or coin whose pattern is to be detected, and a light detecting means (4) eg. a CCD for detecting light reflected from the surface of or transmitted through the object. A pattern on the surface of the object is detected based on information from the light detecting means. The pattern detecting apparatus further comprises a light transmitting means (5) eg. an optical fibre plate for transmitting light advancing in a predetermined direction. The light transmitting means (5) is positioned between the object (7) and the light detecting means (4) such that the predetermined direction coincides with the direction in which the reflected or transmitted light from the object advances. Light of two or more wavelengths may be used with a shared detector or separate detectors.

FIG. 1

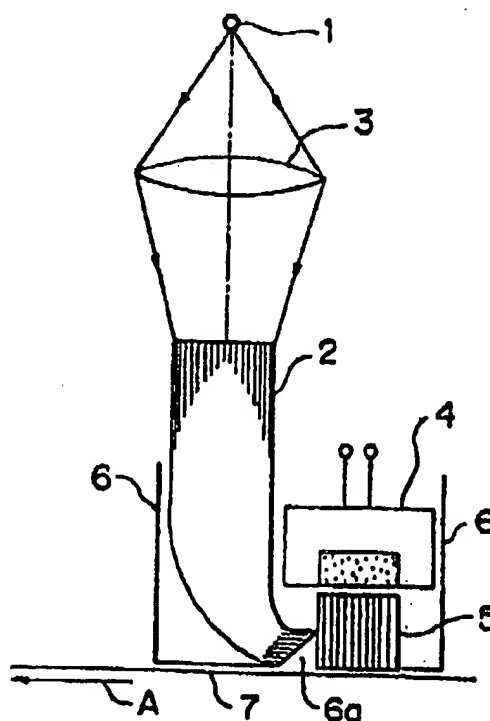

GB 2 272 762 A

1/4

FIG. 1

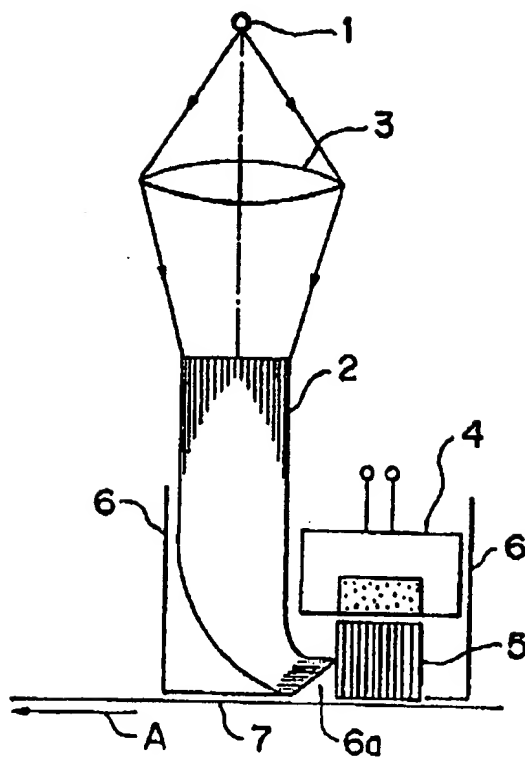
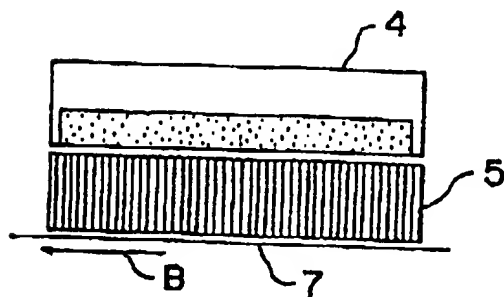
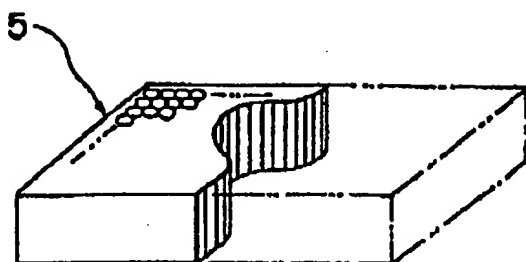


FIG. 2



**FIG. 3**



**FIG. 4**

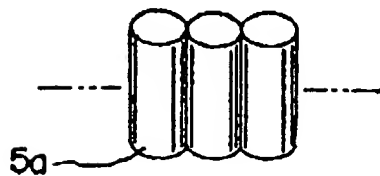


FIG. 5

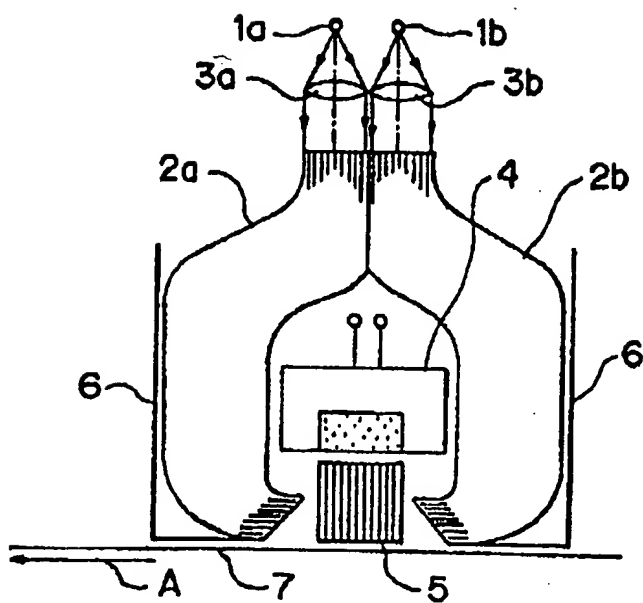


FIG. 6


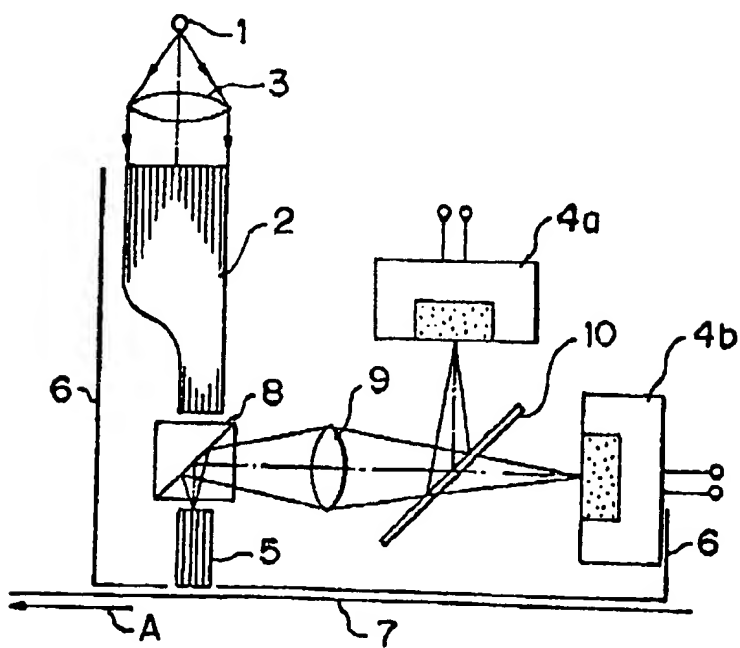


FIG. 7

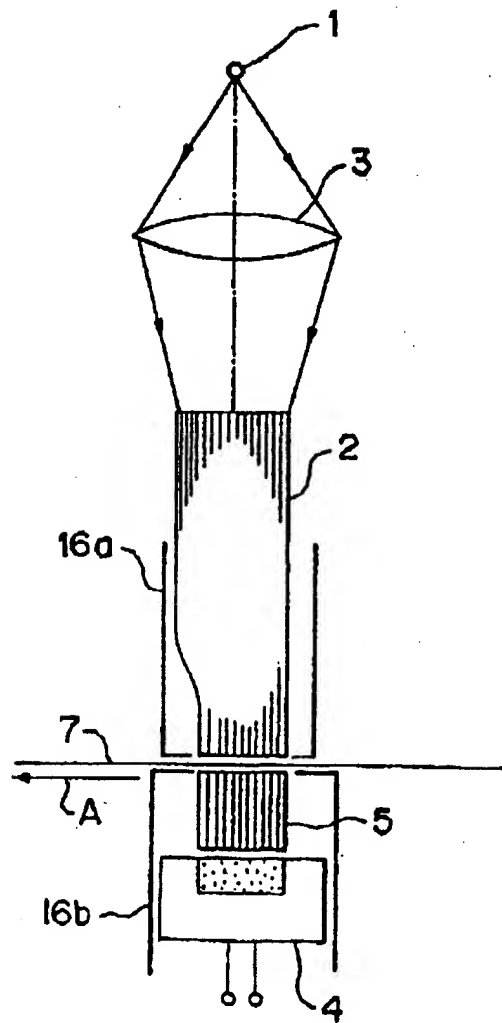

PATTERN DETECTING APPARATUS

The present invention relates to a pattern detecting apparatus for accurately detecting patterns, and more particularly, to such an apparatus for accurately detecting patterns formed on an object such as a bill or bank note (hereinafter referred to collectively as "bill"), coin or the like.

The conventional pattern detecting apparatus comprising a light source, a lens, and an image sensor is well known. In the prior art pattern detecting apparatus, the light source emits light onto the object whose pattern is to be detected, such as a bill or coin, and the lens focuses the image carried by light reflected from or transmitted through the object on the image sensor for reading the image as a pattern, whereby the genuineness, kind and the like of the object are discriminated by comparing the pattern with a reference pattern stored in the apparatus in advance.

Recently, the developed printing and surface forming techniques have made it possible to form fine patterns on the surface of objects. Consequently, a pattern detecting apparatus is required to be able to accurately detect such fine patterns. For example, if a resolution of 500 dpi (dots per inch) is required in order to detect a fine pattern, the pattern detecting apparatus has to be able to detect discrete pattern micro areas measuring as small as  $50\mu\text{m} \times 50\mu\text{m}$ .

However, the individual pixels of image sensor may receive not only information related to the corresponding micro area of the pattern but also, owing to stray light irregularly reflected from or transmitted through the object information related to adjacent areas. In this case, since the information received by each of the pixels is low in accuracy and,

therefore, the signal-to-noise ratio of the whole pattern is inevitably low, fine patterns on the object cannot accurately be detected.

5 It is therefore an object of the invention to provide a pattern detecting apparatus for accurately detecting fine patterns on an object such as a bill, coin or the like.

10 According to one aspect of the invention there is provided a pattern detecting apparatus having an irradiating means for emitting light and irradiating the surface of an object whose pattern is to be detected and a light detecting means for detecting light reflected from the surface of or transmitted through the object, and wherein a pattern on the  
15 surface of the object is detected based on information from the light detecting means, said pattern detecting apparatus further comprising a light transmitting means for transmitting light advancing in a predetermined direction, said light transmitting means  
20 being positioned between said object and said light detecting means such that said predetermined direction coincides with the direction in which said reflected or transmitted light from said object advances.

25 In a preferred aspect of the invention, said irradiating means is adapted to irradiate the surface of said object with at least two kinds of light of different wavelengths, and said light detecting means is adapted to detect said reflected or transmitted light of each wavelength by use of a time sharing  
30 method.

In another preferred aspect of the invention, said irradiating means comprises a light source for emitting light, an optical means for converging the light emitted from said light source, and a light  
35 guide means for guiding the light converged by said optical means onto said object.

In a further preferred aspect of the invention, said light guide means includes an optical fiber bundle having a plurality of optical fibers.

5 In a still further preferred aspect of the invention, said light guide means is adapted to direct said light obliquely onto said object.

In another preferred aspect of the invention, said irradiating means is adapted to emit two kinds of light of different wavelengths and said light  
10 detecting means includes a first detecting means and a second detecting means, said pattern detecting apparatus further comprising a reflecting/transmitting means for reflecting light of a predetermined wavelength and for transmitting light of other  
15 wavelengths, said reflecting/transmitting means being positioned such that said first detecting means receives said reflected or transmitted light of the predetermined wavelength and that said second detecting means receives said reflected or transmitted  
20 light of other wavelengths.

In an alternative aspect of the invention, there is provided a pattern detecting apparatus having an irradiating means for emitting light and irradiating the surface of an object whose pattern is to be  
25 detected, a light detecting means for detecting reflected light from the surface of the object, and wherein a pattern on the surface of the object is detected based on information from the light detecting means, said pattern detecting apparatus further  
30 comprising a light transmitting means for transmitting light advancing in a predetermined direction, said light transmitting means being positioned between said object and said light detecting means such that said predetermined direction coincides with the direction  
35 in which the reflected light from said object advances, and a transmitting/reflecting means for



transmitting the light emitted from said irradiating means and for reflecting the light reflected from said object in a predetermined direction, said light transmitting means and said transmitting/reflecting means being arranged such that the light emitted from said irradiating means reaches said object via said transmitting/reflecting means and said light transmitting means and that the light reflected from said object is received by said light detecting means via said light transmitting means and said transmitting/reflecting means.

In a preferred aspect of the present invention, said transmitting/reflecting means includes a beam splitter.

In another preferred aspect of the invention, said irradiating means is adapted to emit two kinds of light of different wavelengths and said light detecting means includes a first detecting means and a second detecting means, said pattern detecting apparatus further comprising reflecting/transmitting means for reflecting light of a predetermined wavelength and for transmitting light of other wavelengths, said reflecting/transmitting means being positioned such that said first detecting means receives said reflected light of the predetermined wavelength and that said second detecting means receives said reflected light of other wavelengths.

In a further preferred aspect of the invention, said reflecting/transmitting means includes a dichroic mirror.

In a still further preferred aspect of the invention, said light transmitting means includes a plurality of optical fibers arranged in the form of plate.

In another preferred aspect of the invention, said light detecting means includes a plurality of

pixels arranged in a line lying perpendicular to the direction in which said object is to be fed.

In a further preferred aspect of the invention, said detecting means includes a plurality of pixels  
5 arranged in a plurality of lines lying perpendicular to the direction in which said object is to be fed.

In a still further preferred aspect of the invention, said light detecting means comprises CCD (charge-coupled device).

10 The above and other objects and features of the present invention will become apparent from the following description made, by way of example, with reference to the accompanying drawings in which:-.

Figure 1 is a schematic front view of a printed  
15 pattern detecting apparatus which is an embodiment of the present invention;

Figure 2 is a schematic side view of the printed pattern detecting apparatus shown in Figure 1;

Figure 3 is a schematic perspective view of a  
20 fiber plate used in the printed pattern detecting apparatus shown in Figure 1;

Figure 4 is a schematic perspective view of a few of the optical fibers comprising the fiber plate shown in Figure 3;

25 Figure 5 is a schematic front view of a printed pattern detecting apparatus which is another embodiment of the present invention;

Figure 6 is a schematic front view of a printed pattern detecting apparatus which is a further  
30 embodiment of the present invention; and

Figure 7 is a schematic front view of a printed pattern detecting apparatus which is a still further embodiment of the present invention.

Referring to Figure 1, a printed pattern  
35 detecting apparatus which is an embodiment of the present invention comprises a light source 1 for

emitting light toward the surface of a bill 7 on which the pattern to be detected is printed, a lens 3 for converging the light emitted from the light source 1 onto the end face of an optical fiber bundle 2  
5 comprising a number of optical fibers and serving to guide the light converged onto the end face thereof by the lens 3 onto the surface of the bill 7, a fiber plate 5 having a number of optical fibers arranged in the form of a matrix for directing the light reflected  
10 from the surface of the bill 7 to a sensor 4, the sensor 4 having a number of pixels for receiving the reflected light guided by the fiber plate 5, and a light shielding plate 6 for ensuring that the surface of the bill is irradiated only by light from the  
15 optical fiber bundle 2.

As shown in Figure 1, the bill 7, whose surface is printed with a pattern to be detected, is conveyed by a conveying device (not shown) in the direction indicated by arrow A so as to feed the same to the  
20 printed pattern detecting apparatus.

In the printed pattern detecting apparatus, the light emitted from the light source 1 is converged onto the end face of the optical fiber bundle 2. The optical fiber bundle 2 includes a sufficient number of  
25 optical fibers for uniformly irradiating the surface of the bill 7 with the light converged onto the end face of the light bundle 2. The end face of the optical fiber bundle 2 facing the lens 3 is shaped cylindrically or rectangularly so as to be able to  
30 efficiently receive the light emitted from the light source 1 thereon. The light from the optical fiber bundle 2 is directed obliquely onto the surface of the bill 7.

The sensor 4 which is constituted as CCD  
35 (charge-coupled device) has a number of pixels arranged in the scanning direction, and the end face

of the optical fiber bundle 2 facing the sensor 4 is shaped rectangularly to have a width equal to that of the sensor 4 in the scanning direction. Consequently, the light from the light source 1 is uniformly emitted  
5 onto the surface of the bill 7 over the width thereof to be scanned, via the lens 3 and the optical fiber bundle 2.

The shielding plate 6 is formed with an opening 6a of a sufficient size to allow the end face of the  
10 optical fiber bundle 2 and that of the fiber plate 5 to face each other, and to minimize incident light from sources other than the optical fiber bundle 2.

Figure 3 is a schematic perspective view of the fiber plate 5, and Figure 4 is a schematic perspective  
15 view of a few of the optical fibers 5a constituting the fiber plate 5.

As shown in Figure 3, the fiber plate 5 is formed to be plate-like by arranging a number of optical fibers 5a in a matrix. Each of the optical  
20 fibers 5a has a very small diameter and a predetermined length and has its axis oriented vertically. As shown in Figure 4, in this embodiment, the optical fibers 5a are cylindrical. Each has a diameter of 50 $\mu$ m and is adapted for  
25 receiving light on one end face thereof at an angle within  $\pm 10$  degree with respect to the light axis thereof and emitting the received light from the other end face thereof. As shown in Figures 1 and 2, the optical fibers 5a of the fiber plate 5 are arranged in  
30 a matrix to match the image formation surface of the sensor 4.

The fiber plate 5 is positioned to be spaced slightly above the upper surface of the bill 7 conveyed by the conveying device (not shown) such that  
35 only a particular optical fiber 5a receives the light which is emitted from the light source 1, reaches the

surface of the bill 7 via the optical fiber bundle 2 and is reflected from a corresponding micro area of predetermined size on the surface of the bill 7 and that light reflected from other micro areas is  
5 prevented from being received thereby. Namely, since each of the micro areas on the surface of the bill 7 corresponds to a particular optical fiber 5a, the reflected light from each of the micro areas can be received by and only by the corresponding optical  
10 fiber 5a. This embodiment employs  $50\mu\text{m}$  cylindrical optical fibers 5a adapted for receiving light on one end face thereof at an angle within  $\pm 10$  degree with respect to the light axis thereof. Supposing that the diameter of the optical fiber 5a is "a" and that  
15 the wavelength of the irradiated light is "L", the focus depth becomes  $a^2/L$  owing to the pinhole effect at the end face of the optical fiber 5a. In this embodiment, since the light source 1 emits light of a wavelength less than 500 nm, the distance between the  
20 end face of the optical fiber 5a and the surface of the bill 7 is set at 1.25mm.

In this manner, by determining the distance between the end face of the optical fiber 5a and the surface of the bill 7, and setting the size of each  
25 pixel of the sensor 4 at  $50\mu\text{m} * 50\mu\text{m}$  as stated below, the size of each of the micro areas on the surface of the bill 7 can be set at substantially  $50\mu\text{m} * 50\mu\text{m}$ .

The sensor 4 has a number of pixels at the image formation surface thereof. Each of the pixels is  
30 adapted to receive light reflected from a particular micro area on the surface of the bill 7 via the corresponding optical fiber 5a so that the image formation surface of the sensor 4 receives the reflected light from the surface of the bill 7 as an  
35 image of the printed pattern. In this embodiment, the image formation surface of the sensor constituted

as a CCD is provided with a number  $f$  pixels, each measuring  $50\mu\text{m} * 50\mu\text{m}$ , so that each of the pixels corresponds to a particular micro area on the surface of the bill 7. The distance between the fiber plate 5 and the image formation surface of the sensor 4 is determined such that each pixel on the image formation surface of the sensor 4 receives only the light emitted from the corresponding optical fiber 5a and does not receive light emitted from any other optical fiber 5a. Accordingly, the light reflected from a particular micro area on the surface of the bill 7 can be received by the corresponding fine  $50\mu\text{m} * 50\mu\text{m}$  pixel via the corresponding optical fiber 5a of the fiber plate 5. As a result, the printed pattern of the bill 7 is discretely transferred to the fine  $50\mu\text{m} * 50\mu\text{m}$  pixels on the image formation surface of the sensor 4. Consequently, each of the pixels on the image formation surface of the sensor 4 stores only the printed pattern of the corresponding micro area of the bill 7 and does not store the printed pattern of any other micro area.

When the bill 7 is fed to the thus constituted printed pattern detecting apparatus by the conveying device (not shown), the light emitted from the light source 1 reaches the surface of the bill 7 via the lens 3 and the optical fiber bundle 2. The reflected light from each of the micro areas on the surface of the bill 7 is received by the corresponding pixel on the image formation surface of the sensor 4 via a corresponding optical fiber 5a of the fiber plate 5. In this manner, the reflected light from all micro areas on the surface of the bill 7 is received by the pixels of the sensor 4, which is to say that the printed pattern of the bill 7 is transferred onto the image formation surface of the CCD sensor 4. In the well-known manner, the sensor 4 scans the printed

patt rn transferred onto the imag formation surface along the scanning direction B perpendicular to the conveying direction A in response to clock signals received from a control device (not shown) so as to  
5 feed the pattern data to a processing device (not shown), whereby they are compared with the data of a reference pattern for discriminating the genuineness, kind and the like of the bill 7.

Since the conveying speed of the bill 7 is  
10 predetermined, and the number of pixels along the scanning direction is predetermined in accordance with factors such as the size of the bill 7, the clock frequency for scanning the printed pattern transferred onto the image formation surface is determined with  
15 reference to the desired pitch in the conveying direction. For example, supposing that the conveying speed of the bill is 1 m/sec and that the sensor has 4000 pixels arranged in a line along the scanning direction, if printed pattern information at intervals  
20 of 0.2 mm is to be obtained along the conveying direction, the clock frequency is set at 20 MHz because the time for scanning the sensor 4 has to be 0.2 msec. Further, if the sensor has its pixels arranged in a plurality of lines along the scanning  
25 direction, the clock frequency for scanning the sensor 4 is determined with reference to the desired pitch in the conveying direction and the number of pixel lines lying in the scanning direction.

According to this preferred embodiment, since  
30 the reflected light from each of the micro area on the surface of the bill 7 is received by a corresponding pixel measuring  $50\mu\text{m} \times 50\mu\text{m}$  on the image formation surface of the sensor 4 via a corresponding optical fiber 5a of the fiber plate 5, whereby the pixel  
35 stores only the printed pattern data c rresponding t a particular micro area of the bill 7, it is possible

to accurately detect the printed pattern of the bill 7 without the influence from stray light.

Furthermore, according to this preferred embodiment, since the light emitted from the light source 1 is obliquely directed onto the surface of the bill 7 by means of the optical fiber bundle 2, the reflected light from the bill 7 carries not only printed pattern information but information relating to characteristics ascertainable from the laterally reflected light, namely, information concerning unevenness of the surface of the bill 7 caused by the ink forming the printed pattern, wrinkles on the surface of the bill 7 and the like. Consequently, it is possible to detect not only the pattern information based upon optical density but also other information indicative of the quality and condition of the bill 7, whereby it is possible to judge the quality of the bill 7, the degree of damage of the bill 7 and the like.

Figure 5 is a schematic front view of a printed pattern detecting apparatus which is another embodiment of the present invention.

As shown in Figure 5, the printed pattern detecting apparatus comprises a pair of light sources 1a, 1b, a pair of lenses 3a, 3b, a pair of optical fiber bundles 2a, 2b, a fiber plate 5, a sensor 4, and a shielding plate 6. The light source 1a comprises a green light emitting diode (LED), whereas the other light source 1b comprises a red light emitting diode. These light sources 1a, 1b are controlled by the control device (not shown) so as to emit light alternately. The lenses 3a, 3b and the optical fiber bundles 2a, 2b are formed in substantially the same manner as the lens 3 and the optical fiber bundle 2 of the above described embodiment. Similarly, the fiber plate 5 and the sensor 4 are identical to those



employed in the above described embodiment. In this embodiment, the light source 1a, the lens 3a, and the optical fiber bundle 2a constitute a first irradiating unit, and the light source 1b, the lens 3b, and the optical fiber bundle 2b constitute a second irradiating unit. The first and the second irradiating units are symmetrically arranged with respect to the center axis of the fiber plate 5 and the sensor 4.

When the bill 7 is fed to the thus constituted printed pattern detecting apparatus by the conveying device (not shown), the light sources 1a and 1b alternately emit light in accordance with a control signal from the control device (not shown). The light emitted from the light source 1a or 1b reaches the surface of the bill 7 via the lens 3a and the optical fiber bundle 2a or via the lens 3b and the optical fiber bundle 2b. Thus, the reflected light from each of the micro areas on the surface of the bill 7 is received by the corresponding pixel on the image formation surface of the sensor 4 via the corresponding optical fiber 5a of the fiber plate 5. The control device (not shown) feeds clock signals to the sensor 4 in synchronism with the cycle during which the light source 1a or 1b alternately emits light. As a result, the printed pattern transferred onto the image formation surface of the scanner 4 by the light emitted from the light source 1a and reflected from the bill 7 is scanned to form a first printed pattern while the light source 1a is emitting light, whereas the printed pattern transferred onto the same by the light emitted from the other light source 1b and reflected from the bill 7 is scanned to form a second printed pattern while the light source 1b is emitting light. Accordingly, by time shared scanning of the sensor 4, the first printed pattern

can be obtained from the light reflected from the bill surface, during the time that the light source 1a comprising the green LED is emitting light of a wavelength substantially corresponding to that of green, whereas, the second printed pattern can be obtained from the light reflected from the bill surface, during the time that the light source 1b comprising the red LED is emitting light of a wavelength substantially corresponding to that of red. Consequently, pattern information based on two-color separation can be obtained. Finally, the thus obtained printed pattern data for the entire bill surface produced by the sensor 4 is fed to the processing device (not shown), whereby they are compared with the reference pattern to discriminate the genuineness, kind and the like of the bill 7.

According to this embodiment, since the printed patterns of the bill 7 is analyzed into printed pattern information based upon two-color separation of green and red separation, it is possible to more accurately detect the printed pattern of the bill 7.

Figure 6 is a schematic front view of a printed pattern detecting apparatus which is a further embodiment of the present invention.

As shown in Figure 6, the printed pattern detecting apparatus comprises a light source 1, a lens 3, an optical fiber bundle 2, a fiber plate 5, sensors 4a, 4b, and a shielding plate 6. In addition it comprises a beam splitter 8 with a longitudinal axis of the same length as the length of the fiber plate in the scanning direction, a lens 9 arranged such that the focal points thereof are positioned on the surface of the sensor 4b and on the end face of the fiber plate 5, and a dichroic mirror 10 for reflecting light of a wavelength substantially corresponding to that of orange and for transmitting light of other wavelength.

The dichroic mirror 10 is also arranged such that another focal point of the lens 9 is positioned on the surface of the sensor 4a. The light source 1 is selected to emit light having red and orange wavelengths.

The light having red and orange wavelengths emitted from the light source 1 enters the beam splitter 8 via the lens 3 and the optical fiber bundle 2 and passes through the fiber plate 5 so that the surface of the bill 7 is irradiated thereby. The light reflected from each of the micro areas on the surface of the bill 7 passes through a corresponding optical fiber 5a of the fiber plate 5, is thereafter, reflected by a 45 degree reflecting mirror of the beam splitter 8. Since the lens 9 is arranged such that the focal points thereof are positioned on the surfaces of the sensors 4a, 4b and on the end face of the fiber plate 5 as described above, the reflected light of orange wavelength is converged onto the surface of the sensor 4a, whereas other reflected light is converged onto the surface of the sensor 4b. Consequently, by scanning the sensor 4a, a first printed pattern based on the reflected orange light from the bill 7 can be obtained, and by scanning the sensor 4b, a second printed pattern based on the reflected red light from the bill 7 can be obtained.

Similarly to the earlier embodiment, the printed patterns transferred onto the image formation surfaces of the sensors 4a, 4b are scanned in the scanning direction perpendicular to the conveying direction A in response to clock signals from the control device (not shown) so as to feed the thus obtained printed pattern data for the entire bill surface to the processing device (not shown), whereby they are compared with the reference pattern to discriminate the genuineness, kind and the like of the bill 7.

Since this embodiment employs a light source 1 which emits the light of both red and orange wavelengths, it is possible to obtain the printed patterns of the bill 7 based on two-color separation and accurately detect the printed pattern of the bill 7 by means of a simpler optical system.

Furthermore, according to this embodiment, since the optical axis of the incident light is substantially coincident with that of the reflected light, the reflection efficiency between the irradiated light and the reflected light can be improved.

Figure 7 is a schematic front view of a printed pattern detecting apparatus which is a still further embodiment of the present invention.

The printed pattern detecting apparatus of Figure 7 is adapted to detect the printed pattern of the bill 7 based on light transmitted through the bill 7. Similarly to the embodiment shown in Figures 1 to 4, light emitted from the light source 1 is converged onto the end face of the optical fiber bundle 2 by the lens 3 so that the surface of the bill 7 is irradiated therewith through the optical fiber bundle 2. A shielding plate 16a is disposed to allow only light emitted from the light source 1 to reach the surface of the bill 7. On the opposite side of the conveying passage of the bill 7 from the optical fiber bundle 2 are provided a fiber plate 5 for receiving the light transmitted through the bill 7 and a sensor 4 for receiving the transmitted light via the fiber plate 5 so as to enable detection of the printed pattern of the bill 7. A shielding plate 16b is disposed to allow all the light transmitted through the bill 7 to be received by the fiber plate 5.

The fiber plate 5 is positioned to be spaced slightly from the lower surface of the bill 7 conveyed

by the conveying apparatus (not shown) such that each of the particular optical fibers 5a receives only light transmitted through a single corresponding bill 7 micro area of predetermined size and is prevented from receiving the light transmitted through any other micro area of the bill 7. Since each of the micro areas on the surface of the bill 7 corresponds to a particular optical fiber 5a of the fiber plate 5, the transmitted light through each of the micro areas can be received by and only by the corresponding optical fiber 5a. The CCD sensor 4 is provided with a number of pixels at the image formation surface thereof. Each of the pixels is adapted to receive the light transmitted through a particular micro area on the surface of the bill 7 via the corresponding optical fiber 5a so that the image formation surface of the sensor 4 receives the transmitted light through the entire bill 7 as an image of the printed pattern.

Similarly to the embodiment shown in Figures 1 to 4, the printed patterns transferred onto the image formation surface of the sensor 4 are scanned in the scanning direction perpendicular to the conveying direction A in response to clock signals from a control device (not shown) so as to feed the printed pattern data for the entire bill surface to a processing device (not shown), whereby it is compared with a reference pattern to discriminate the genuineness, kind and the like of the bill 7.

According to this embodiment, since the light transmitted through each of the micro areas on the surface of the bill 7 is received by the corresponding pixel on the image formation surface of the sensor 4 via the corresponding optical fiber 5a of the fiber plate 5, whereby, the pixel stores only the printed pattern data for the corresponding micro area of the bill 7, it is possible to accurately detect the

printed pattern of the bill 7 without influence from  
stray light.

As described above with reference to the  
preferred embodiments, according to the present  
5 invention, it is possible to provide a pattern  
detecting apparatus for accurately detecting fine  
patterns on an object whose pattern is to be detected,  
such as a bill, coin or the like.

The present invention has thus been shown and  
10 described with reference to the specific embodiments.  
However, it should be noted that the present invention  
in no way limited to the details of the described  
arrangements but changes and modifications may be made  
without departing from the scope of the appended  
15 claims.

For example, although the above described  
embodiments detect the pattern printed on a bill 7,  
the present invention is not limited to detection of  
the printed pattern on a bill but can be used for  
20 detecting printed patterns including characters,  
numerals, symbols, figures and the like printed on  
various other kinds of sheet materials. Further, in  
the embodiments shown in the Figures 1 to 6, it is  
possible to detect patterns formed on the surface of a  
25 coin or the like by means of a method other than  
printing.

Further, although in the above described  
embodiments the fiber plate 5 allows only light from a  
bill or other such object oriented in a predetermined  
30 direction to pass therethrough, in place of the fiber  
plate 5 it is possible to employ some other member  
with optical characteristics such that light from a  
particular micro area on the surface of the object can  
be received by and only by the end face thereof facing  
35 the object and be fed out from the other end face  
thereof, when it is positioned adjacent to the object.

For example, a large number of hollow pipes each having a minute cross section and having a cylindrical or honeycomb shape may be employed.

Furthermore, although in the above described  
5 embodiments the sensor 4 is provided with a number of pixels arranged in a plurality of lines along the scanning direction, it is possible to arrange the pixels of the sensor in a single line.

Moreover, although in the embodiment shown in  
10 Figure 5 the printed pattern information based on two color separation is obtained by employing two light sources 1a, 1b one emitting green light and the other emitting red light, it is apparent that the printed pattern information based on the separation of more  
15 than two colors may be obtained by further providing light sources emitting light of other wavelengths in addition to the above described light sources. Further, in the embodiment shown in Figure 6, printed pattern information based on the separation of more  
20 than two colors may be obtained by providing additional dichroic mirrors and sensors.

Further, in the embodiment shown in Figure 5, it is possible to arrange the apparatus so that both of the light sources 1a, 1b emit white light  
25 simultaneously, that the light from both of the light sources 1a, 1b is reflected by the bill 7 and that the printed pattern transferred onto the sensor 4 is scanned. According to this alternative arrangement, since the white light can be simultaneously emitted  
30 from both of the end faces of the optical fiber bundle 2a, 2b onto the bill 7, it is possible to accurately detect the printed pattern, even though the reflectivity of the bill 7 is small.

Furthermore, although in the above described  
35 embodiments the bill is irradiated by the light sources, the lenses, and the optical fibers, it is

apparent that laser sources which emit laser beam may be used instead thereof.

Moreover, in the present invention, the respective means need not necessarily be physical means and arrangements whereby the function of the  
5 respective means are accomplished by software fall within the scope of the present invention. In addition, the function of a single means may be accomplished by two or more physical means and the  
10 functions of two or more means may be accomplished by a single physical means.

15

20

25

30

35



CLAIMS:

1. A pattern detecting apparatus having an  
irradiating means for emitting light and irradiating a  
5 surface of an object whose pattern is to be detected,  
and a light detecting means for detecting light  
reflected from the surface of or transmitted through  
the object, wherein a pattern on the surface of the  
object is detected based on information from the light  
10 detecting means, said pattern detecting apparatus  
comprising:

a light transmitting means for transmitting light  
advancing in a predetermined direction, said light  
transmitting means being positioned between said  
15 object and said light detecting means such that said  
predetermined direction coincides with the direction  
in which said reflected or transmitted light from said  
object advances.

20 2. A pattern detecting apparatus according to  
Claim 1, said irradiating means being adapted to  
irradiate the surface of said object with at least two  
kinds of light of different wavelengths, and  
said detecting means being adapted to detect said  
25 reflected or transmitted light of each wavelength by  
use of a time sharing method.

3. A pattern detecting apparatus according to  
Claim 1 or Claim 2, said irradiating means comprising  
30 a light source for emitting light, an optical means  
for converging the light from said light source, and a  
light guide means for guiding the light converged by  
said light guide means onto said object.

35 4. A pattern detecting apparatus according to  
Claim 3, said light guide means including an optical

fiber bundle having a plurality of optical fibers.

5        5.    A pattern detecting apparatus according to  
Claim 3 or Claim 4, said light guide means being  
adapted to direct said light obliquely onto said  
object.

10       6.    A pattern detecting apparatus according to  
Claim 1, said irradiating means being adapted to emit  
two kinds of light of different wavelengths, said  
light detecting means including a first detecting  
means and a second detecting means, said pattern  
detecting apparatus further comprising:

15       a reflecting/transmitting means for reflecting  
light of a predetermined wavelength and for  
transmitting light of other wavelengths, said  
reflecting/transmitting means being positioned such  
that said first detecting means receives said  
reflected or transmitted light of the predetermined  
20       wavelength and that said second detecting means  
receives said reflected or transmitted light of the  
other wavelengths.

25       7.    A pattern detecting apparatus according to  
Claim 6, said reflecting/transmitting means including  
a dichroic mirror.

30       8.    A pattern detecting apparatus according to  
any one of Claims 1 to 7, said light transmitting  
means including a plurality of optical fibers arranged  
in the form of plate.

35       9.    A pattern detecting apparatus according to  
any one of Claims 1 to 8, said light detecting means  
including a plurality of pixels arranged in a line  
lying perpendicular to the direction in which said

obj ct is fed.

10. A pattern detecting apparatus according to  
any one of Claims 1 to 8, said detecting means  
5 including a plurality of pixels arranged in a  
plurality of lines lying perpendicular to the  
direction in which said object is fed.

11. A pattern detecting apparatus having an  
10 irradiating means for emitting light onto and  
irradiating a surface of an object whose pattern is to  
be detected, and a light detecting means for detecting  
reflected light from the surface of the object,  
wherein a pattern on the surface of the object is  
15 detected based on information from the light detecting  
means, said pattern detecting apparatus comprising:

a light transmitting means for transmitting light  
advancing in a predetermined direction, said light  
transmitting means being positioned between said  
20 object and said light detecting means such that said  
predetermined direction coincides with the direction  
in which the reflected light from said object  
advances; and

a transmitting/reflecting means for transmitting  
25 the light emitted from said irradiating means and for  
refracting the light reflected from said object in a  
predetermined direction, said light transmitting means  
and said transmitting/reflecting means being arranged  
such that the light emitted from said irradiating  
30 means reaches said object via said  
transmitting/reflecting means and said light  
transmitting means and that the light reflected from  
said object is received by said light detecting means  
via said light transmitting means and said  
35 transmitting/reflecting means.

12. A pattern detecting apparatus according to Claim 11, said transmitting/reflecting means including a beam splitter.

5 13. A pattern detecting apparatus according to Claim 11, said irradiating means being adapted to emit two kinds of light of different wavelengths, said light detecting means including a first detecting means and a second detecting means, said pattern  
10 detecting apparatus further comprising:

a reflecting/transmitting means for reflecting light of a predetermined wavelength and for transmitting light of other wavelengths, said reflecting/transmitting means being positioned such  
15 that said first detecting means receives said reflected light of the predetermined wavelength and that said second detecting means receives said reflected light of the other wavelengths.

20 14. A pattern detecting apparatus according to Claim 13, said reflecting/transmitting means including a dichroic mirror.

25 15. A pattern detecting apparatus according to any one of Claims 11 to 14, said light transmitting means including a plurality of optical fibers arranged in the form of plate.

30 16. A pattern detecting apparatus according to any one of Claims 11 to 15, said light detecting means including a plurality of pixels arranged in a line lying perpendicular to the direction in which said object is fed.

35 17. A pattern detecting apparatus according to any one of Claims 11 to 15, said detecting means

including a plurality of pixels arranged in a plurality of lines lying perpendicular to the direction in which said object is fed.

- 5           18. A pattern detecting apparatus substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

10

15

20

25

30

35

Patents Act 1977  
 Examiner's report to the Comptroller under Section 17  
 (The Search report) **25**

Application number  
 GB 9323372.4

**Relevant Technical Fields**

Search Examiner  
 D C BRUNT

(i) UK Cl (Ed.M) G1A (AMBP, AMZ)

(ii) Int Cl (Ed.5) G01N (21/88, 21/89); G01R (31/308); G07D (5/00, 7/00)

Date of completion of Search  
 12 JANUARY 1994

**Databases (see below)**

(i) UK Patent Office collections of GB, EP, WO and US patent specifications.

Documents considered relevant following a search in respect of Claims :-  
 1-18

(ii)

**Categories of documents**

- |   |   |
|---|---|
| <b>X:</b> Document indicating lack of novelty or of inventive step.   | <b>P:</b> Document published on or after the declared priority date but before the filing date of the present application.        |
| <b>Y:</b> Document indicating lack of inventive step if combined with one or more other documents of the same category. | <b>E:</b> Patent document published on or after, but with priority date earlier than, the filing date of the present application. |
| <b>A:</b> Document indicating technological background and/or state of the art.   | <b>&amp;:</b> Member of the same patent family; corresponding document.   |

Category	Identity of document and relevant passages		Relevant to claim(s)
X,Y	GB 2192275 A	(LAUREL) Whole document	X: 1, 3, 4, 5 Y: 9, 10
X,Y	GB 2107911 A	(CUBIC) See Figures 3-5	X: 1 Y: 9, 10
Y	GB 2035549 A	(PERKIN) See Claim 1	9, 10
X,Y	GB 1384501	(LANDIS) See page 2 lines 1-20	X: 1 Y: 9, 10
X,Y	EP 0240277 A2	(K K SIGMA) See page 3 line 13 - page 4 line 13	X: 1 Y: 9, 10
X,Y	EP 0101115 A1	(NEDERLANDSE) See page 5 lines 5-10	X: 1 Y: 9, 10

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).